

FMC251

Dual ADC 2.6 GSPS, ADC 250
MSPS and DAC 12 GSPS, FMC



FMC251

Key Features

- ADC 14-bit @ 2.6 GSPS (AD9689)
- ADC 16-bit @ 250 MSPS (AD9467)
- DAC 16-bit @ 12 GSPS (AD9164/AD9162)
- FPGA Mezzanine Card (FMC) per VITA 57
- Front panel interface includes Trig In/Out
- Clock input for synchronization via front or rear

Benefits

- High dynamic range for versatility in video/broadcast requirements
- Ideal for Broadband communications systems, Wireless infrastructure, LTE, ATE, RADAR/Jamming
- Compatible with a broad range of Xilinx- and Altera-based FMC carriers from VadaTech and others
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



FMC251

The FMC251 is an FMC per VITA 57 specification. The board has a dual channel high-speed ADC, single channel high-speed DAC and single channel low-speed ADC.

The FMC251 utilizes AD9689 dual channel ADC providing 14-bit conversion rates of up to 2.6 GSPS and a DAC AD9164 (option for AD9162) providing 16-bit conversion rates of up to 12 GSPS. An additional ADC channel is provided by a single AD9467 which gives 16-bit conversion at up to 250 MSPS.

The module has a Trigger Input/Output, clock and all analog Input/Output via SSMC connectors.

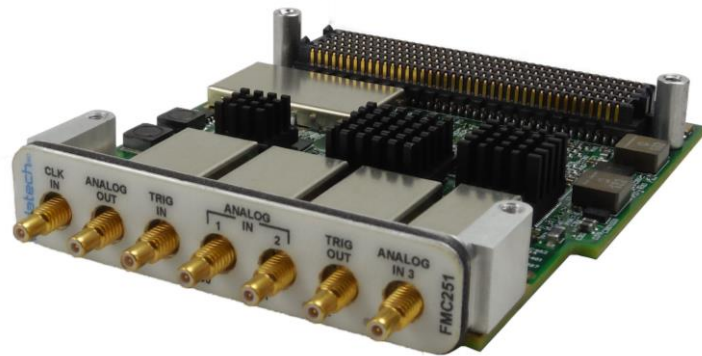


Figure 1: FMC251

Block Diagram

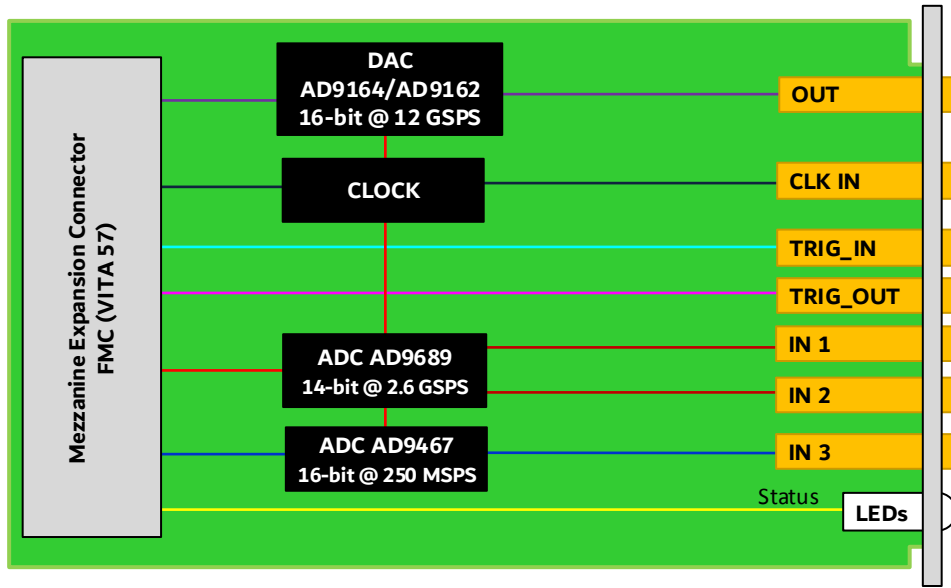


Figure 2: FMC251 Functional Block Diagram

Specifications

Architecture		
Physical	Dimensions	Single Module
		Width: 2.71" (69 mm)
		Depth: 3.01" (76.5 mm)
Type	FMC	Analog I/O
Standards		
FMC	Type	ANSI/VITA 57.1 - 2008
Configuration		
Power	FMC251	8W
Environmental	Temperature	See Ordering Options
		Storage Temperature: -40° to +85°C
	Altitude	40,000 ft non-operating
	Vibration	Operating 9.8 m/s ² (1G), 5-500 Hz
	Shock	Operating 30Gs each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	Six of SSMC
	LEDs	Status
Software Support	Operating System	Agnostic
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

FMC251 – ABC-D00-G0J

A = ADC	D = AD9467 Front End	G = FMC Board Spacing
0 = AD9689 @ 2 GSPS 1 = AD9689 @ 2.6 GSPS	0 = AC Couple 1 = DC Couple	0 = 10 mm (per VITA 57 specification) 1 = 17.5 mm*
B = RF Input Signal		
0 = <5 GHz 1 = >5 GHz		
C = DAC		J = Temperature Range and Conformal Coating
0 = AD9164 1 = AD9162		0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane** 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic**

Notes:

*For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC.

**Conduction cooled; temperature is at edge of module. Consult factory for availability.


Related Products

AMC592



- AMC FPGA carrier for FMC per VITA 57
- Xilinx UltraScale™ XCKU115 FPGA
- Supported by DAQ Series™ data acquisition software

FMC214



- Dual complete transceiver signal chain solution using Analog Devices AD9361 transceiver
- Frequency range 70 MHz to 6 GHz with instantaneous bandwidth from 200 kHz to 56 MHz
- MIMO transceiver is Time Domain Duplex (TDD) and Frequency Domain Duplex (FDD) compatible

VPX592



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.5 – FEB/20