VTX879

¹/₂ ATR Short VPX Chassis with Five 3U Slots and ARINC 600 style I/O Connector

VTX879

Key Features

- 1/2 ATR Short VPX style system platform
- Up to five 3U VPX payload slots
- Conduction cooled modules per VITA 48
- Power via 3U power Module
- ARINC 600 style for I/O

OpenVP

Benefits

- Standard VPX Power Module slot
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



THE POWER OF VISIO

VTX879

The VTX879 is a $\frac{1}{2}$ ATR VPX Chassis with five 3U VPX slots. The I/O is via ARINC 600 style and can be designed to customer specification.

Power Supply

The VTX879 has a single slot 3U VPX Power Module.

Cooling

The module has fins on the two sidewalls to radiate the heat out.

Backplane

The backplane can provide up to five 3U VPX payload slots in addition to the single slot for the Power Module. The backplane is routed to customer specifications.

Figure 1: VTX879 Front View

Figure 2: VTX879 Rear View

Chassis Layout

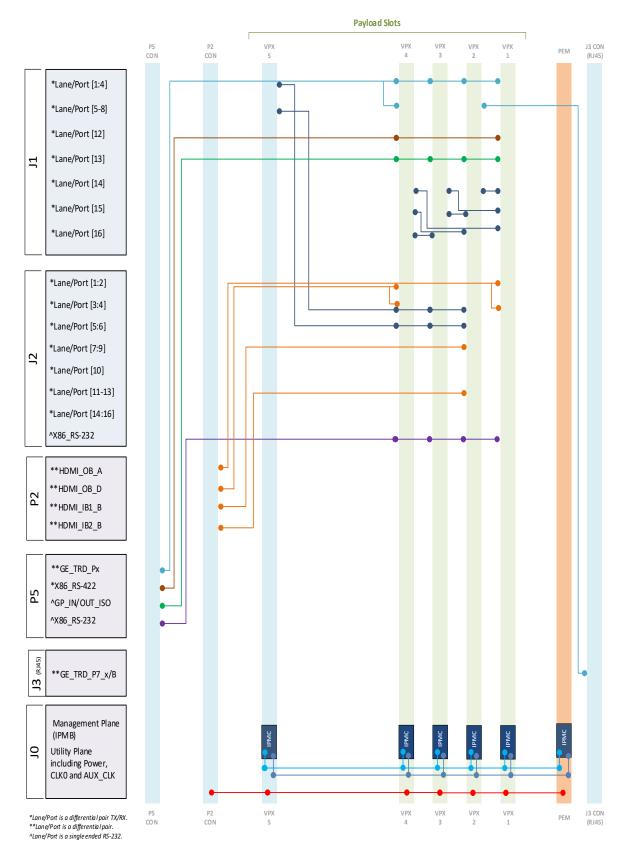


Figure 3A: VTX879 Chassis Layout - Front

Front	Power Slot	VPX 1	VPX 2 4. VTX87	VPX 3	VPX 4	VPX 5	 Rear
Front		1	2	3	4		Rear

Figure 4: VTX879 Chassis Slots

Specifications

Architecture				
Physical	Dimensions	Height: 7.62"		
-		Width: 4.88" (7" with Extended Side Wall Fins for enhanced thermal performance)		
		Depth: 12.62" (with handle an additional 2.38")		
		Weight: TBD		
Туре	VPX Shelf	5 Payload Slots up to 1.0" pitch and one Power Slot		
Standards				
VPX	Туре	VITA 46.0 Baseline Specification		
Configuration				
Power	VTX879	Standard 3U VPX Power		
Environmental		See Ordering Options		
Cooling		Front to Back		
Other				
MTBF	MIL Hand book 217	MIL Hand book 217-F@ TBD hrs		
Certifications	Designed to meet F	Designed to meet FCC, CE and UL certifications, where applicable		
Standards	VadaTech is certifie	VadaTech is certified to both the ISO9001:2015 and AS9100D standards		
Warranty	One (1) year, see <u>VadaTech Terms and Conditions</u>			

OpenVPX allows for a wide range of pin assignments and use cases. Prior to purchasing VadaTech products as standalone items (i.e., not part of an integrated platform) please consult with VadaTech on the system architecture to ensure compatibility.

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as preconfigured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VTX879 – ABC-D00-GHJ

A = Customer Backplane profile*	D = Extended Side Wall Fins**	G = Applicable Slot Profile
1 = Per figure 3A 2 = Reserved 3 = Reserved	0 = Total width 7" 1 = Reserved 2 = Reserved	0 = 5HP, IEEE 1101.10 1 = 5HP, VITA 48.1
B = ARINC 600 Style*		H = Environmental
1 = MMB-R3TL0N1NN-133 2 = Reserved 3 = Reserved		See Environmental Specification
C = VPX Connector Type		J = Conformal Coating
0 = Standard 50u Gold Rugged 1 = KVPX Connectors		0 = No coating 1 = Humiseal 1A33 polyurethane 2 = Humiseal 1B31 acrylic

Notes: *Please contact VadaTech for specific part numbers ** Total Width does not impact ARINC 404 Tray Mounting Interface

Environmental Specification

		Conduction Cooled	
Option H			H = 4
Operating Temperature			CC4* (-40°C to +85°C)
Storage Temperature			C3* (-50°C to +100°C)
Operating Vibration			V3 (0.1 g2/Hz max)
Storage Vibration			OS2* (40g)
Humidity			95% non-condensing

Related Products

VPX518



VPX599



- AMC FPGA carrier for FMC per VITA 57
- Xilinx Zynq-7000 FPGA in FFG-900 package (XC7Z100 or XC7Z045) with embedded ARM®
- Supported by DAQ Series[™] data
- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner
- 3U FPGA Dual DAC and Dual ADC per VITA 46
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC 12-bit @ 6.4 GSPS

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014 Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhu Street, Neihu District, Taipei 114, Taiwan Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- · Partnerships power innovation
- · Collaborative approach
- Mutual success

We deliver complexity

- · Complete signal chain
- System management
- · Configurable solutions

We manufacture in-house

- Agile production
- · Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA[™] and the AdvancedMC[™] logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

> © 2023 VadaTech Incorporated. All rights reserved. DOC NO. 4FM737-12 REV 01 | VERSION 2.2 – APR/24

